Samsung Galaxy Tab S2 9.7 AT&T Screen Replacement

Replace your broken tablet screen.

Written By: Joy Harris



INTRODUCTION

A damaged screen makes viewing anything on the tablet difficult. Removing the screen may require a heat gun or an iOpener. Check out this iOpener guide for instructions on how to use it.

TOOLS:

- Suction Handle (1)
- iFixit Opening Tools (1)
- Heat Gun (1)
- Precision Tweezers Set (1)
- iOpener (1)


Step 1 — Screen






- Apply the heat gun around the edges of the tablet to melt the adhesive glue.
- Do not allow the gun to remain still for more than two seconds, so that you do not melt the plastic around the screen.
- If you do not have access to a heat gun, you may also use an iOpener or a hair dryer. Refer to the iOpener guide for extra help.

Step 2

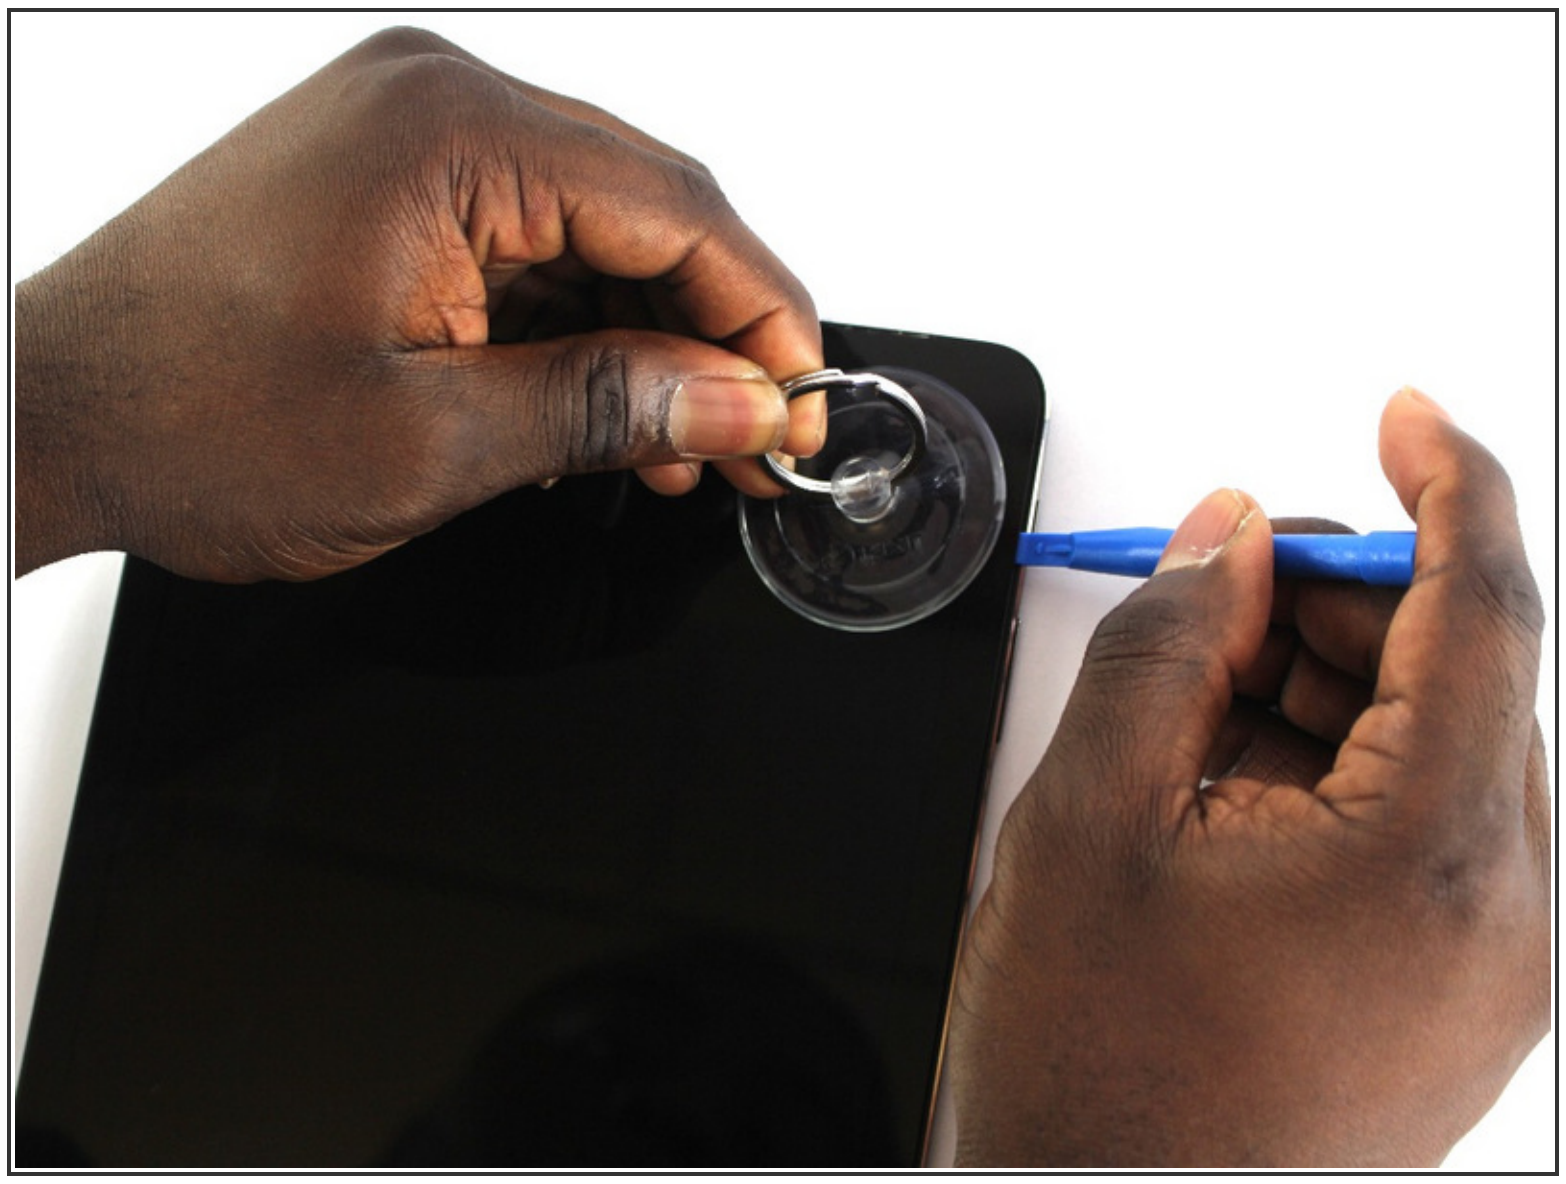

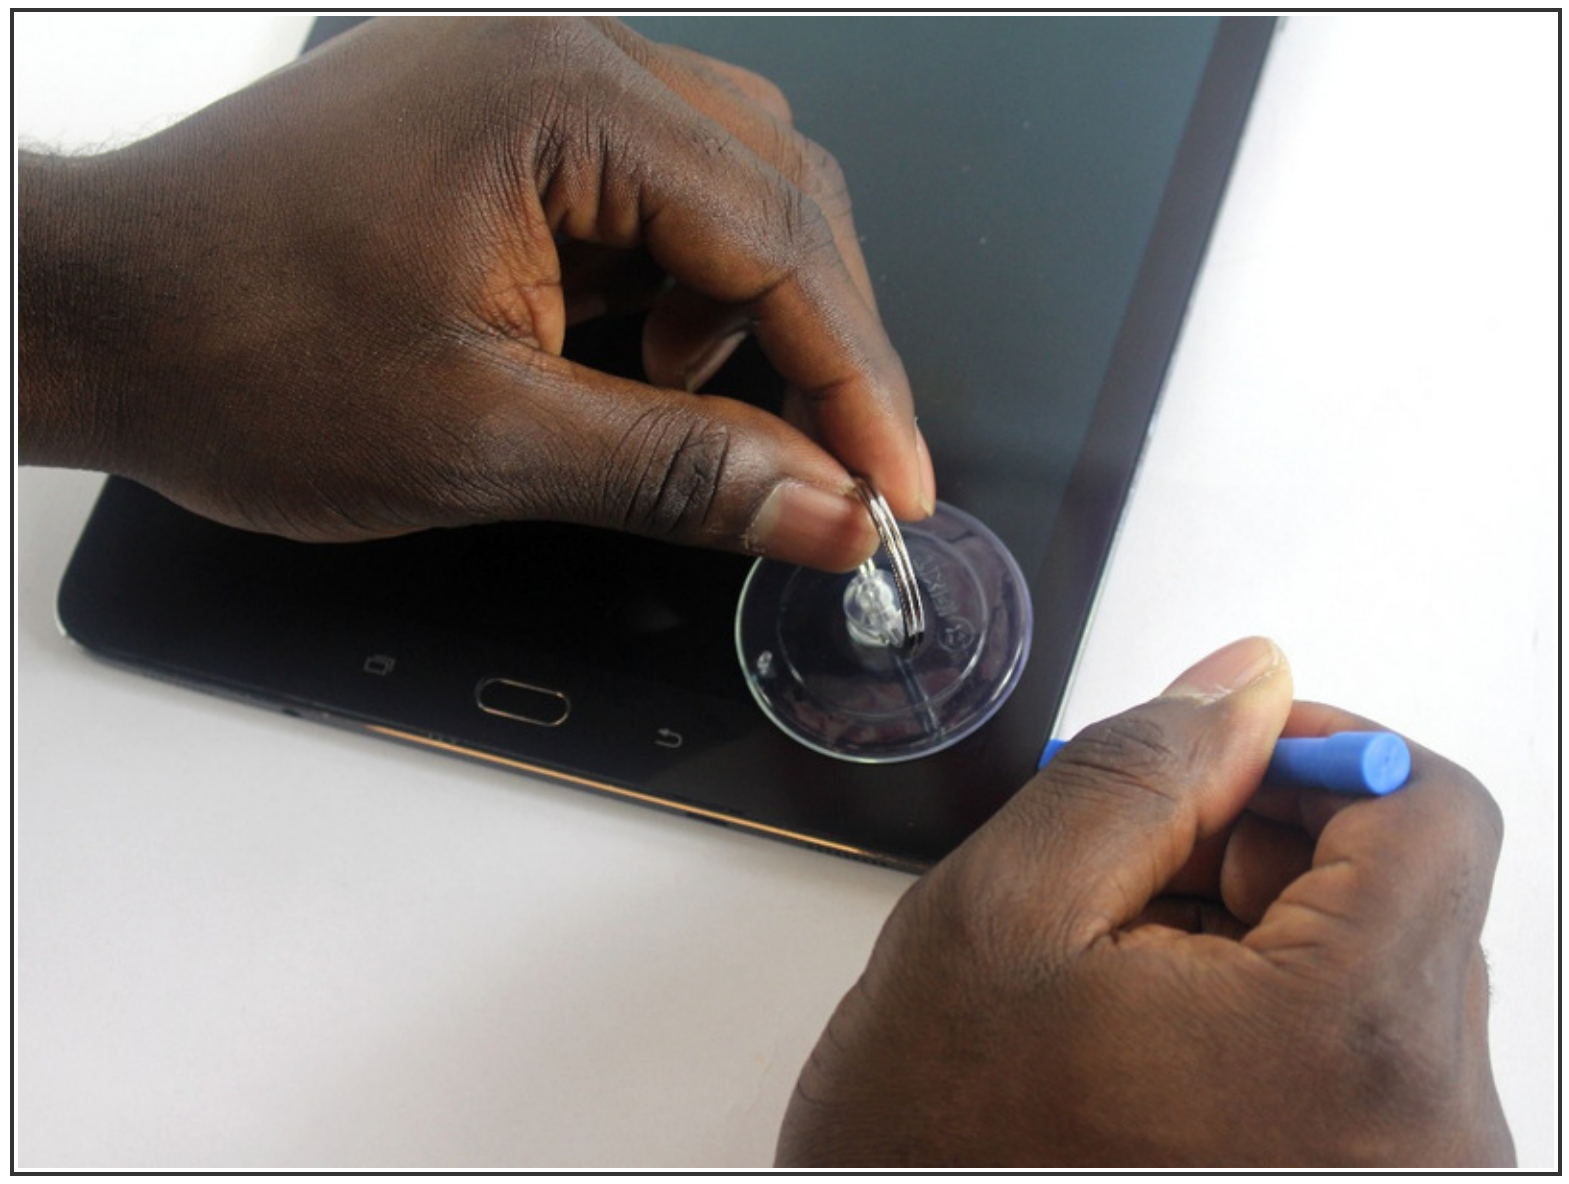

- Apply the suction to the bottom or top right corner.
- Use the plastic opening tool at several points around the screen while the suction is being applied to pop the screen out.


Step 3



- Once the screen is detached, open the tablet like a book.

⚠ Gently open the tablet, and do not pull the pieces apart since you can risk damaging the orange ribbon cable.

Step 4

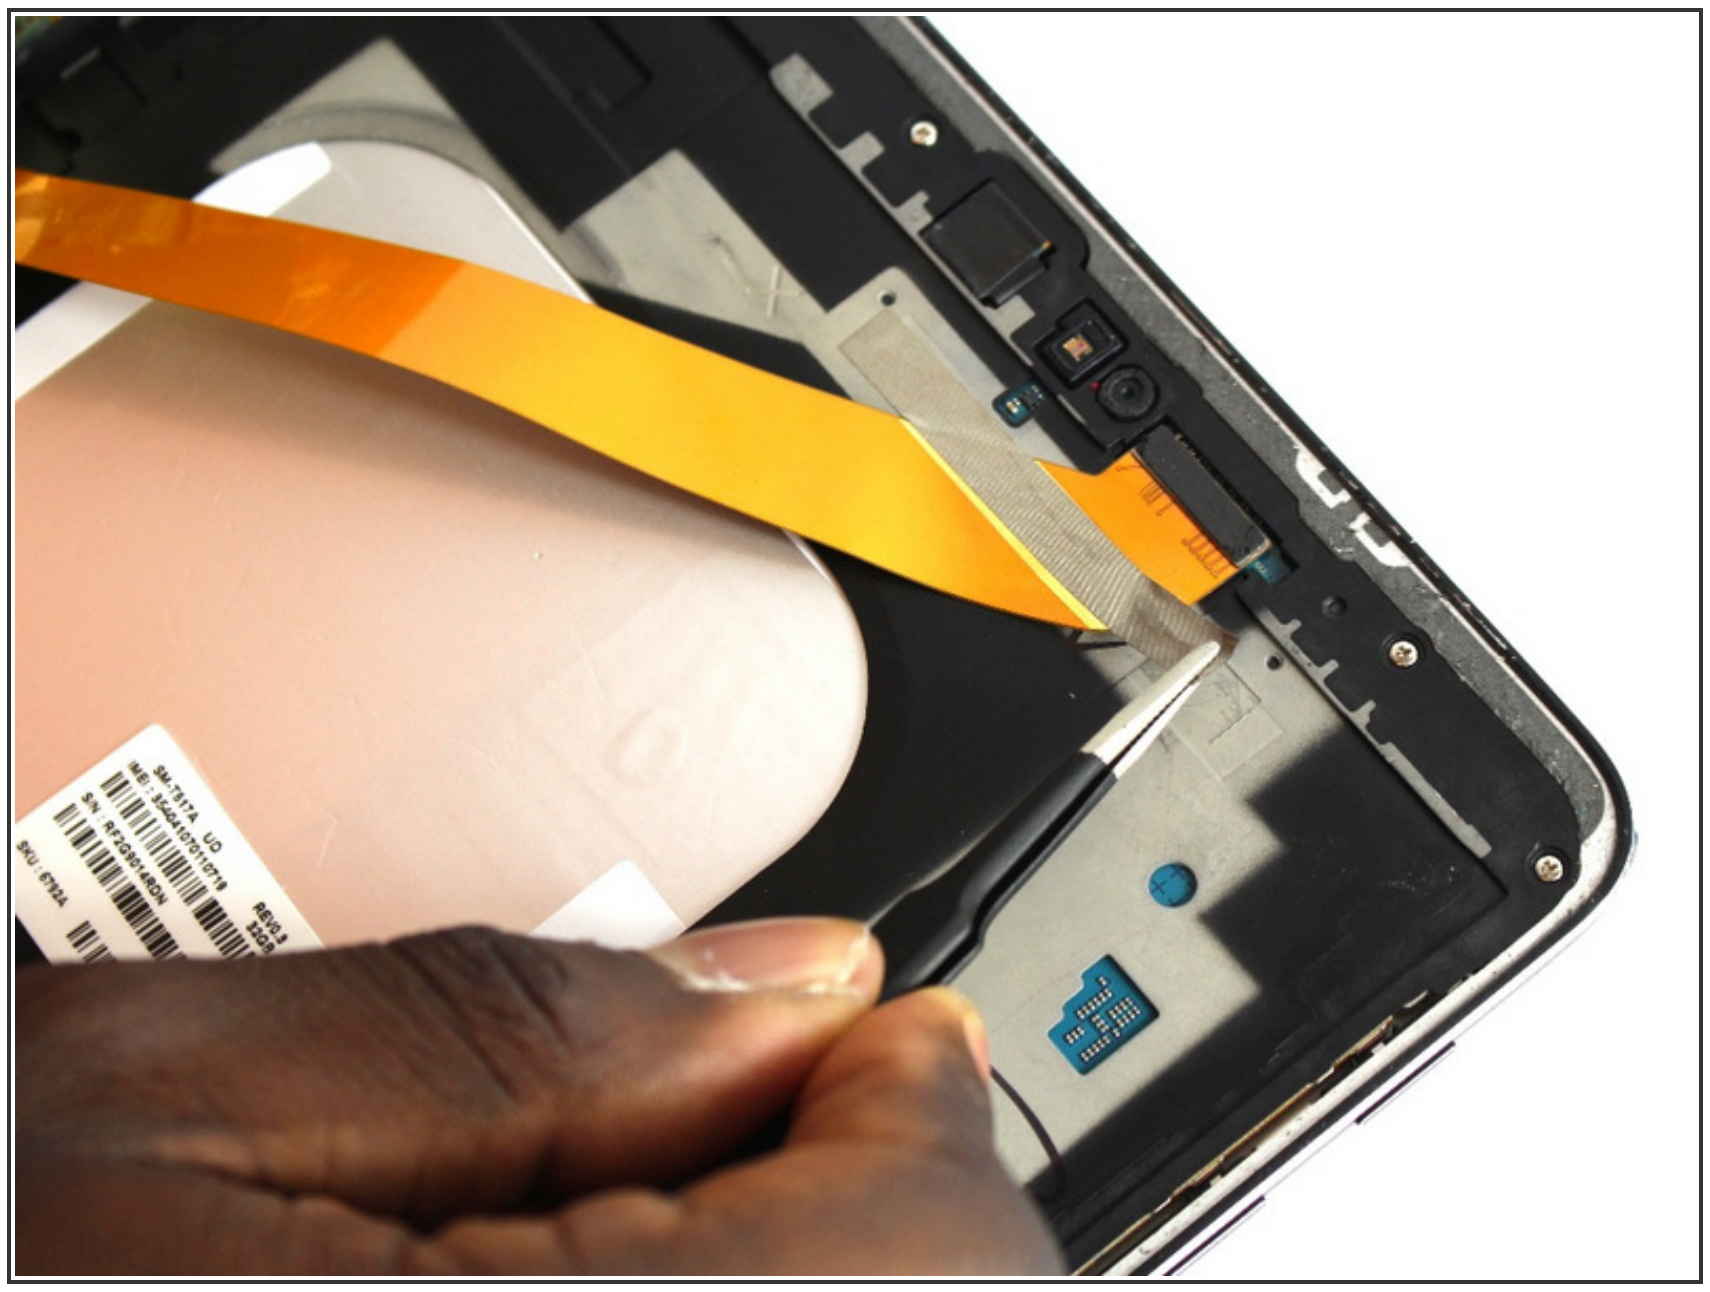

- Using the precision tweezers, remove the silver tape that is holding the orange ribbon cable connecting the two pieces.

Step 5



- Using the precision tweezers, remove the small press-fit connector from the body of the tablet.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-18 10:38:18 AM.